


REVISIONS		
SYM	DESCRIPTION	DATE BY
1	ADDED NOTE FOR CONDUIT CLEARANCE	10/98 DDN

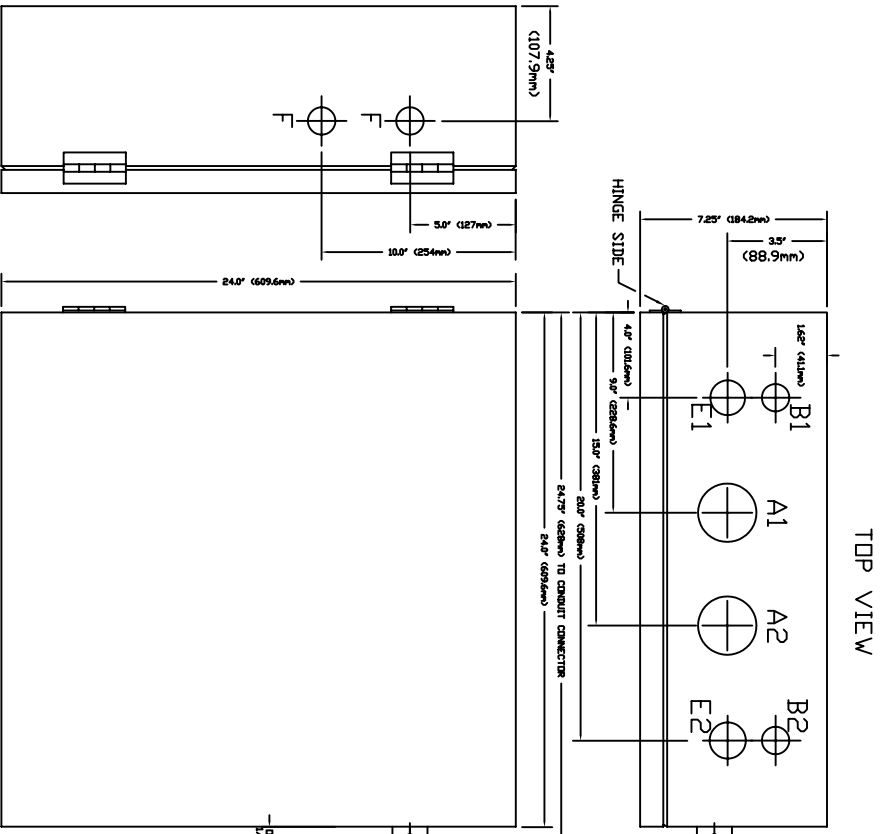

TOP VIEW

LEFT SIDE VIEW

FRONT VIEW

RIGHT SIDE VIEW

KNOCKOUT LEGEND-
 A=HOLE FOR 2" (50.8mm) CONDUIT
 (Carries Voltage Sense Leads,
 Thermistor & Current Sensor Leads)
 B=HOLE FOR 1/2" (12.7mm) CONDUIT
 (Carries Loading Current Leads)
 C=HOLE FOR GROUNDING OR 1/2" (12.7mm)
 CONDUIT
 (Carries Communications & Alarm)
 D=120 VAC POWER CONDUIT
 E=HOLE FOR 3/4" (19mm) CONDUIT
 F=SPARE HOLES.
 B1 or E1 are preferred for the LCL
 Conduits; B2 and E2 are optional

6 foot from
top of
enclosure to
floor

LEAVE MARGINS
OPEN ON THIS SIDE
OF 1/2" METAL CONDUIT AND
POWER BRK

1/2" METAL CONDUIT

NAME		BVS-S3 KNOCKOUT DIMENSIONS		BTECH INC.	
USED	BVS-S3 ALL MODELS	SCALE	NONE	10 Astro Place	
DN		DATE	9/18/98	Rockaway, NJ 07866	
TOLERANCE		DRAWN/DRAWN/CHK		ND. S3-1	
UNLESS OTHERWISE SPECIFIED		APPR		REV. 1 SH. 1 DF 1	
0.000±0.005 ANGLES±0.5°					
0.00±0.010					
0.0±0.030					

CAD: FTGR.DN.C

BVS-S3 ENCLOSURE: Location of Holes & Knockouts